


M12 -ruuvit/screws:
-kiristysmomentti/
tightening torque
120 Nm.
Käytä ruuvilukitetta/
Secure with Loctite.

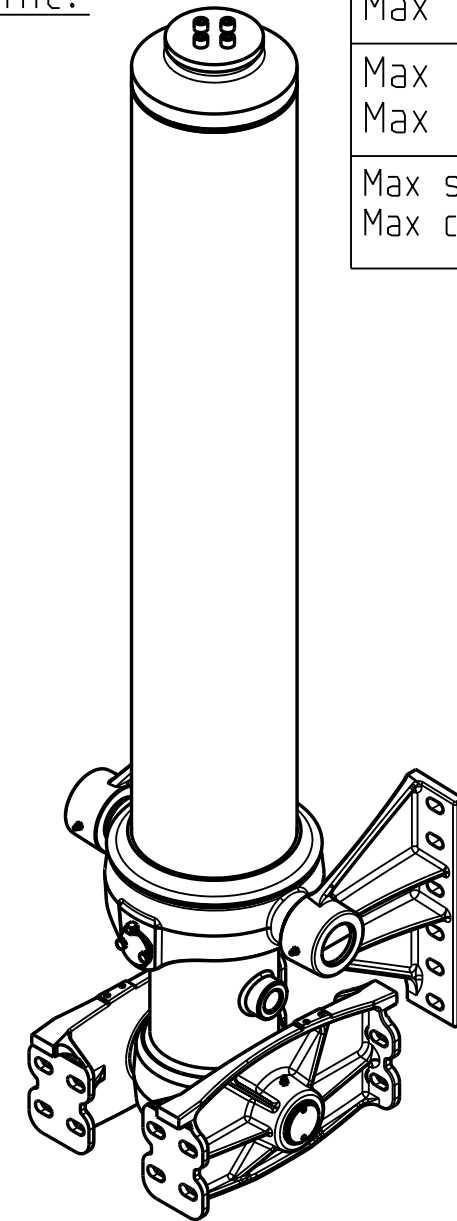

Iskutilavuus Stroke volume	63,8 dm ³
Max paine Max pressure	20 MPa 200 bar
Max sylinterikuorma Max cylinder thrust	200 kN 20 ton
Max kippauskuorma Max tipping load	400 kN 40 ton
Max syl kallistuskulma Max cyl tilting angle	32°

Ø vaihe Ø stage	Isku Stroke
149	1369
129	1371
110	1372
91	1372
Total	5484

Date	Drawn	Revision		
		Piirt Drawn VVa	GENERAL TOLERANCE : ISO 2768-m	Aihio Preform -
		Pvm Date 23.09.22	THREAD TOLERANCE : ISO 965-3/ISO 228-1	Paino (kg) Weight 298.703
		Koko Size A3	WELD ACCORDING TO: ISO 5817	Mat STD -
Liittyy / Belongs to			Material	
DFC-EFC			-	
Nimitys			Suhde/Scale	Revision
NY DFC 149-4-5484 137 D5			17:100	-
Name			Piirustus no / Drawing no	
LU DFC 149-4-5484 137 D5			310105906	

* Min 20 mm pull out needs to be added!