


M12 -ruuvit/screws:
-kiristysmomentti/
tightening torque
120 Nm.
Käytä ruuvilukitetta/
Secure with Loctite.

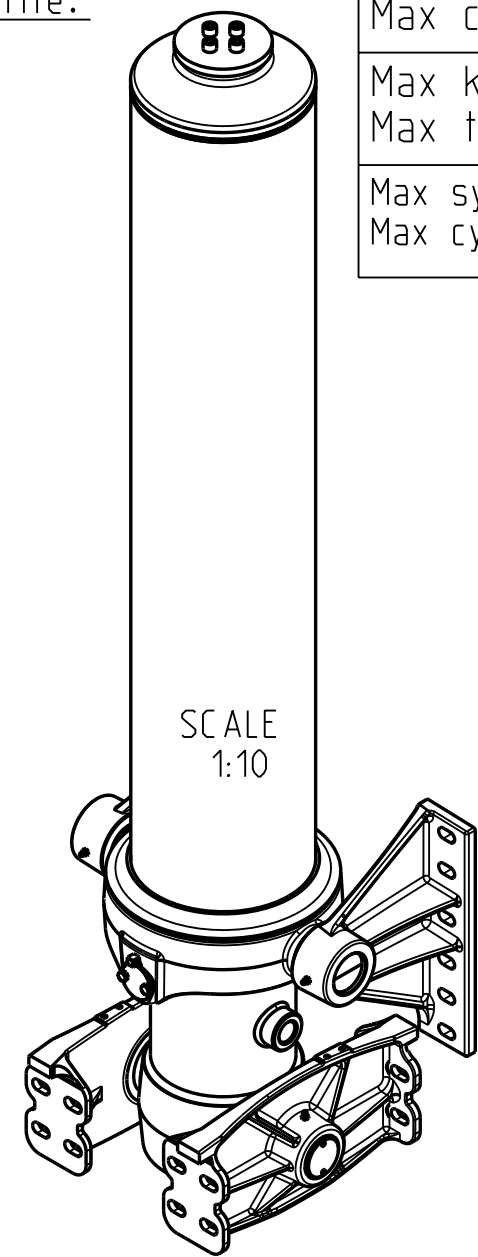

Iskutilavuus Stroke volume	98,6 dm ³
Max paine Max pressure	19 MPa 190 bar
Max sylinterikuorma Max cylinder thrust	250 kN 25 ton
Max kippauskuorma Max tipping load	500 kN 50 ton
Max syl kallistuskulma Max cyl tilting angle	32°

Ø vaihe Ø stage	Isku Stroke
169	1427
149	1429
129	1431
110	1432
91	1432
Total	7151

* Min 20 mm pull out needs to be added!

Date	Drawn	Revision		
		Piirt Drawn VVa	GENERAL TOLERANCE : ISO 2768-m	Aihio Perform -
		Pvm Date 12.09.22	THREAD TOLERANCE : ISO 965-3/ISO 228-1	Paino (kg) Weight 378.451
		Koko Size A3	WELD ACCORDING TO: ISO 5817	Mat STD -
Liittyy / Belongs to			Material	
DFC-EFC			-	
Nimitys			Suhde/Scale	Revision
NY DFC 169-5-7151 D5 143			17:100	-
Name			Piirustus no / Drawing no	
LU DFC 169-5-7151 D5 143			310105862	

