
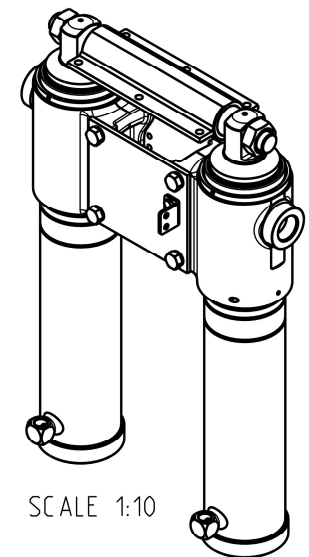
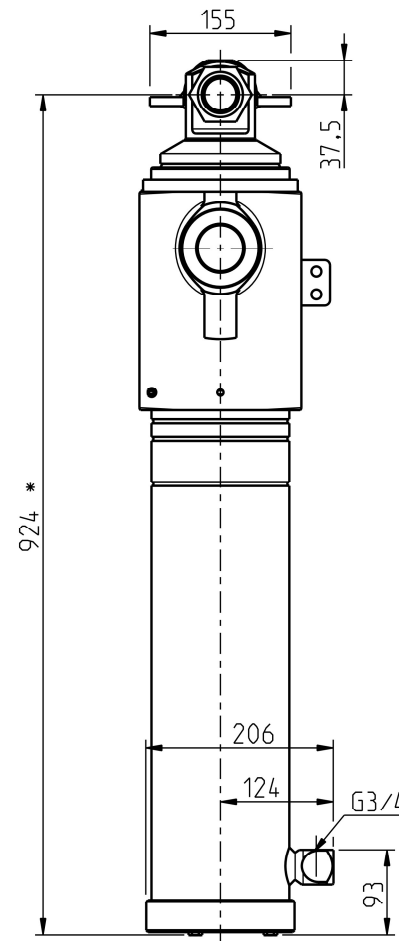


From the bottom of the body bracket to the bottom of the z-beam.

More detailed mounting dimension on drawing 300209200

Ø Vaihe Ø Stage	Isku/ Stroke mm
132	647
115	655
100	650
85	650
70	650
55	673
Yht/Total	3925

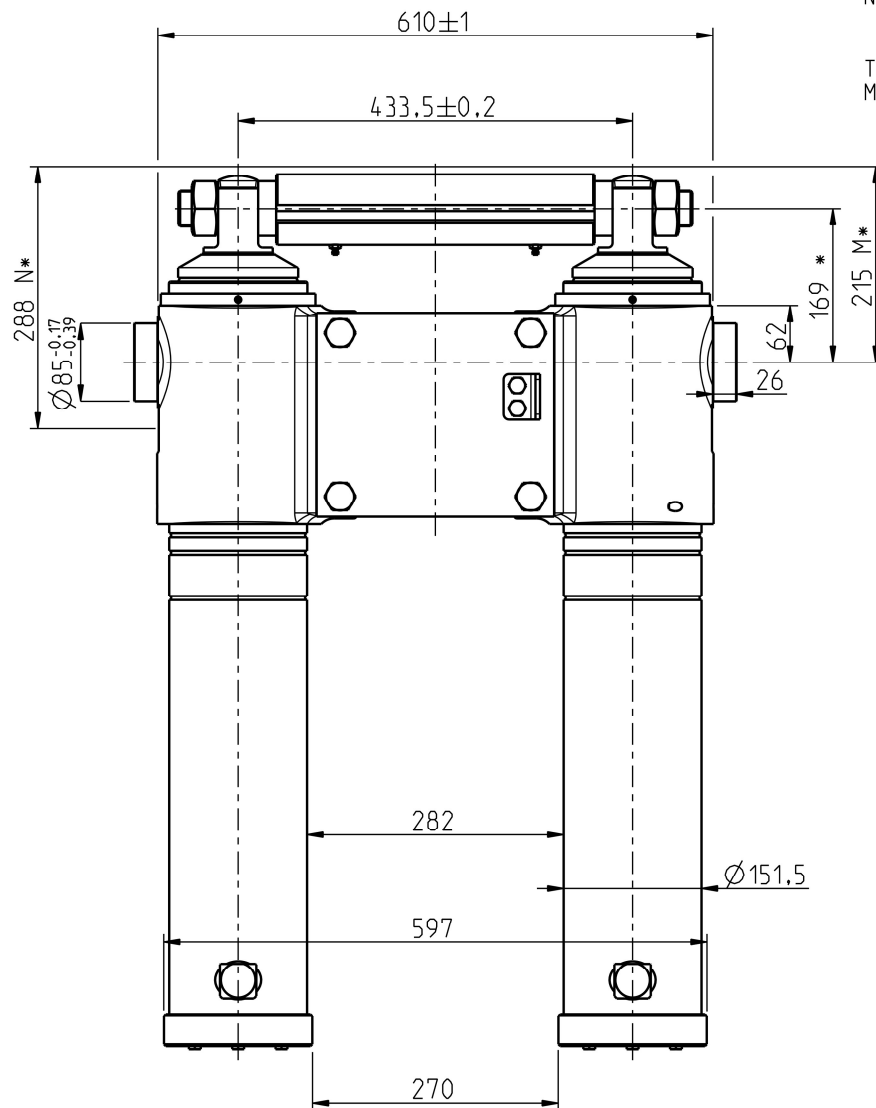

SCALE 1:10

Wipro Luottamuksellinen/Confidential

Iskutilavuus / Stroke volume 57.2 dm³

Max. paine / pressure 250 bar (25 MPa)

Max. kuorma / load 50 t

* Asennusvara / Recommended mounting space min. 15 mm

Date	Drawn	Revision			
	Pirt Drawn	TDa	GENERAL TOLERANCE : ISO 2768-m	Aihio Prefrom	-
	Pvm Date	22.09.23	THREAD TOLERANCE : ISO 965-3 / ISO 228-1	Paino (kg) Weight	249.984
	Koko Size	A3	WELD ACCORDING TO: ISO 5817	Mot STD	-
	Liittyy / Belongs to RTW 66 50†			Material --	
	Nimitys	SRYHMÄ 152 / 55x3925		Suhde/Scale	Revision
	Name	TWIN RAM 152 / 55x3925		Piirustus no / Drawing no 310210468	