


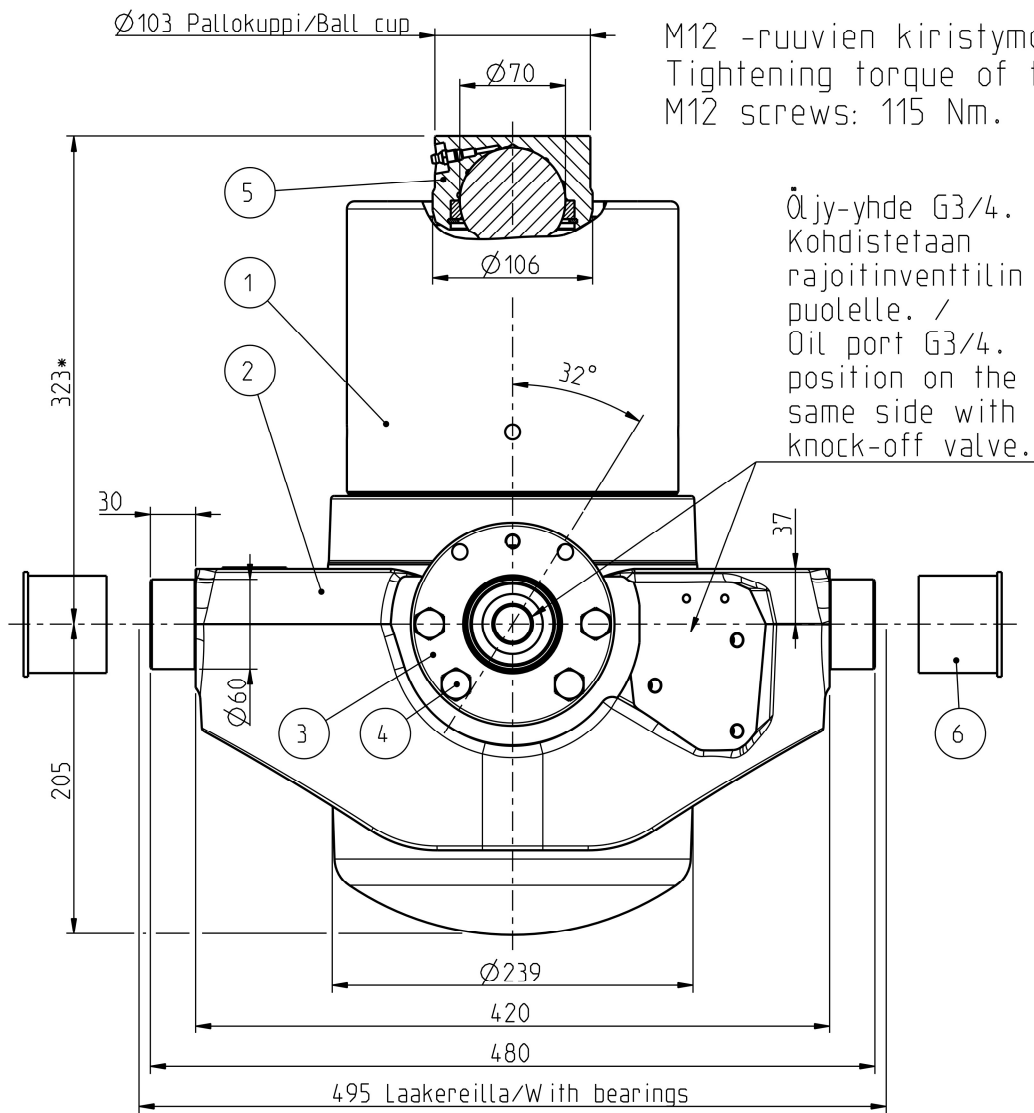


M12 -ruuvien kiristymomentti: /
Tightening torque of the
M12 screws: 115 Nm.

Öljy-yhde G3/4.
Kohdistetaan
rajoitinventtilin
puolelle. /
Oil port G3/4.
position on the
same side with
knock-off valve.

Iskutilavuus Stroke volume	38,3 dm ³
Max paine Max pressure	28 MPa 280 bar
Max kuorma Max load	300 kN 30 ton
Max syl. kulma Max cyl. angle	32°

Ø Vaihe Ø Stage	Isku/ Stroke mm
194	336
172	345
152	348
132	350
115	336
100	288
85	304
70	298
55	250
Yht/Total	2855

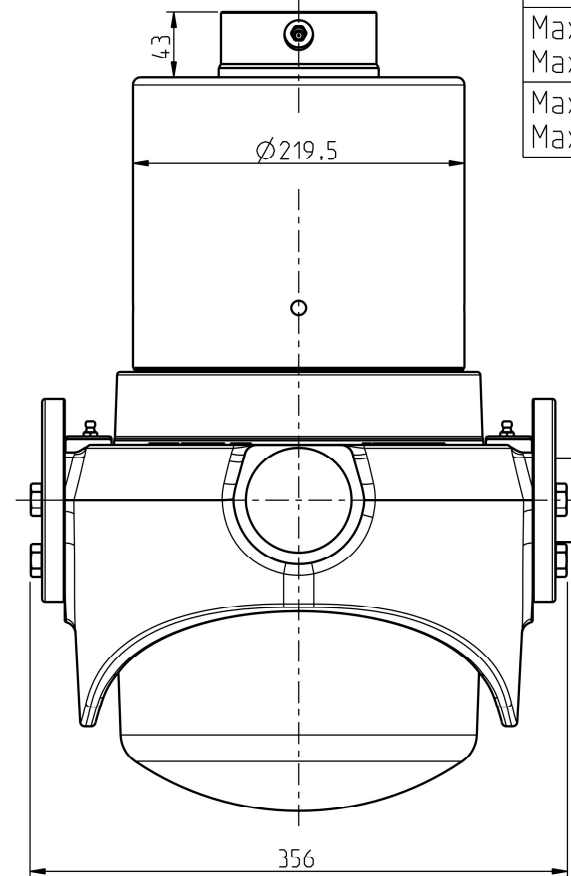

* +Asennusvara / Mounting space min 15 mm.

6	2	CWT045129122	PROTECTION CAP 60	-
5	1	320209515	BALL CUP 70 SUT, SDC M8x1 106	-
4	8	350510431	HEX SCREW M12x40 -10.9 DELTA	SCREW KIT: 350511339
3	2	320210049	BEARING CRADLE SUT LL	-
2	1	320210050	CYLINDER CRADLE SUT 194-172 LL	-
1	1	310209444	TEL 194-9-2855 SUT 32 PV HP	-
POS.	QTY	PRODUCT CODE	NAME	NOTE

Date	Drawn	Revision	GENERAL TOLERANCE: ISO 2768-m	Aihio Preform	-
Pym Date	09.07.24	THREAD TOLERANCE : ISO 965-3/ISO 228-1	Paino (kg) Weight	155.515	
Koko Size	A3	WELD ACCORDING TO: ISO 5817	Mat STD	-	
Lifitly / Belongs to				Material	-
SUT 32 LL				Suhde/Scale	Revision
Nimitys				3:10	
Name				PIIRUSTUS no / Drawing no	
LU SUT 32 LL 194-9-2855 PV				310210642	